

15/19/1  
DIALOG(R)File 347:JAPIO  
(c) 2003 JPO & JAPIO. All rts. reserv.

07338059   \*\*Image available\*\*  
SEAL DEVICE

PUB. NO.:       2002-206549 [JP 2002206549 A]  
PUBLISHED:     July 26, 2002 (20020726)  
INVENTOR(s):   YUKI SAKAE  
APPLICANT(s):  KYORITSU PACKING KK  
APPL. NO.:     2000-404972 [JP 2000404972]  
FILED:         December 28, 2000 (20001228)  
INTL CLASS:    F16C-033/78; F16J-015/32

ABSTRACT


PROBLEM TO BE SOLVED: To provide a seal device capable of providing an assured sealing state even if a positional displacement occurs in both radial and axial directions.

SOLUTION: This rubber seal device 1 for sealing a clearance (g) formed between the inner diameter end part of a seal case 3 and the outer periphery of a shaft 4 comprises an annular fixed part 6 fixed to the shaft 4, an arm part 7 extending to the right and left sides from the fixed part 6, and a pair of seal lips 8 and 8 extending aslant in the outer radial direction from the tip of the arm part 7 toward both right and left side faces of the seal case 3 and coming into contact with the right and left side faces of the seal case 3.

COPYRIGHT: (C)2002,JPO

C:\Program Files\Dialog\DialogLink\Graphics\4C.bmp

(A)

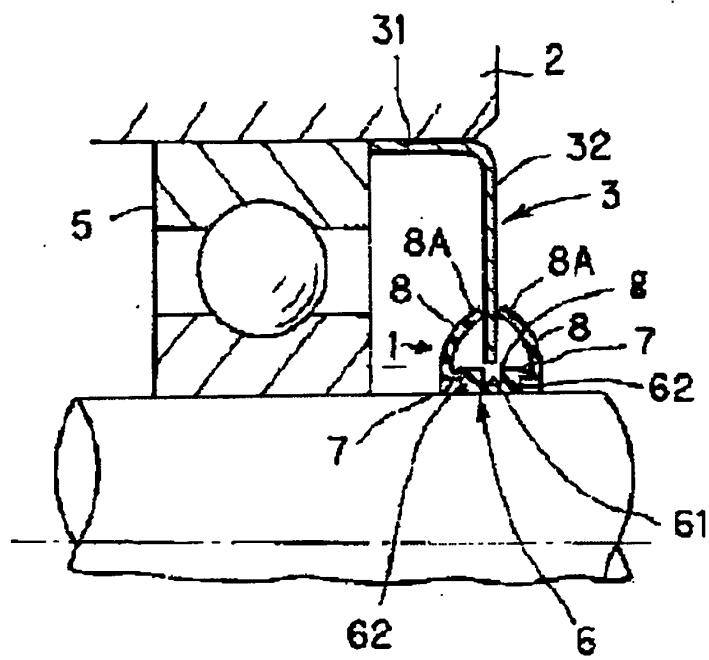

(B)

